
FELLER PRECAST
PRECAST DUCT BANK SOLUTIONS

Multi-Conduit Duct Bank Sections

Typical high-density configurations · 24-way and 28-way

6X4 24-Way Duct Bank


24 × 4" conduit · 3'-9" W × 3' H

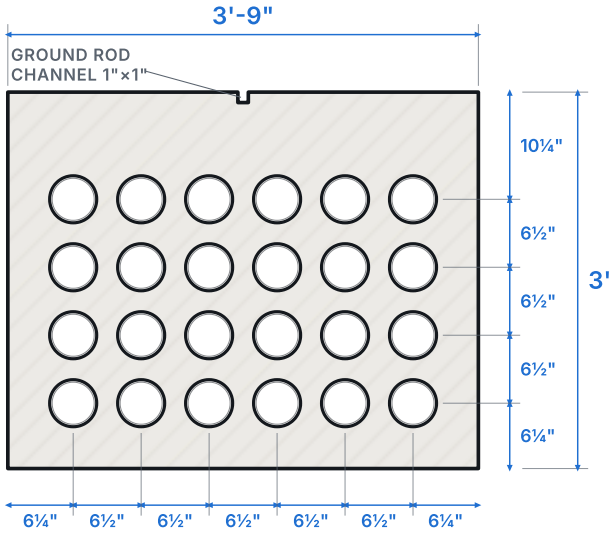

TYPICAL CROSS-SECTION


7X4 28-Way Duct Bank

28 × 4" conduit · 4'-3½" W × 3' H

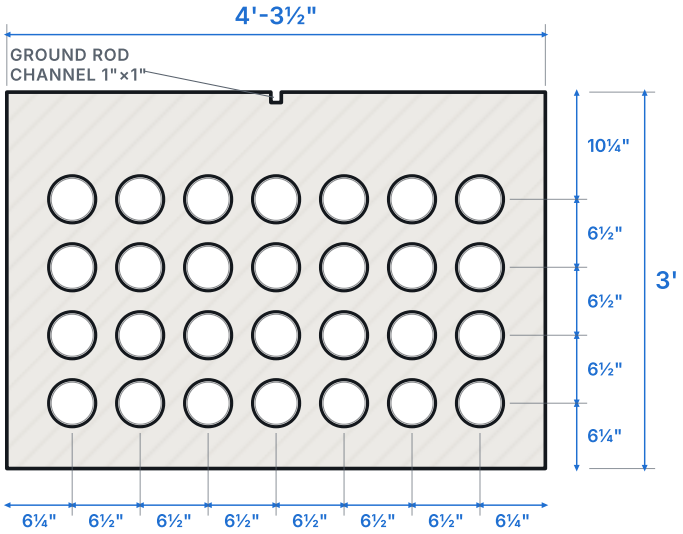

TYPICAL CROSS-SECTION

TYPICAL PROFILE (24- AND 28-WAY)

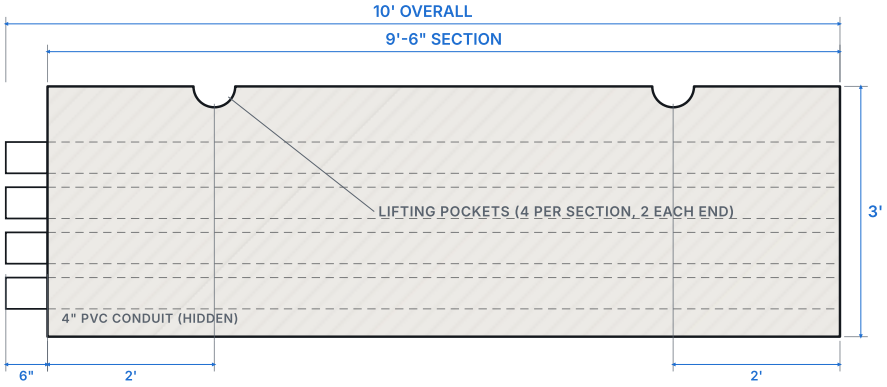

COMMON SPECIFICATIONS

Section length	**10' overall (9'-6" concrete + 6" conduit extension)**
Height	**3'**
Conduit	**4" Schedule 40 PVC**
Conduit spacing	**6½" on center (horizontal & vertical)**
Edge / bottom cover to conduit center	**6¼"**
Top cover to conduit center	**10¼"**
Ground rod channel	**1" × 1", cast along top face**
Lifting	**4 cast-in lifting pockets per section**
Reinforcement	**Engineered per project**

Typical configurations shown for illustration. Conduit size, count and spacing, overall dimensions, reinforcement, embedded hardware and lifting details are engineered to each project's requirements. Not for construction; project-specific shop drawings provided on request.

fellerprecast.com
sales@fellerprecast.com